

PCI500-4A

AC/DC Compact PCI Power Supply



Murata Power Solutions

POWER: 500 Watt AC/DC


SIZE: 5.08" X 12.27" X 4.48"

NUMBER OF OUTPUTS: 4

OBSOLETE PRODUCT

Contact Factory for Replacement Model

www.cdtchno.com
click on Power Electronics

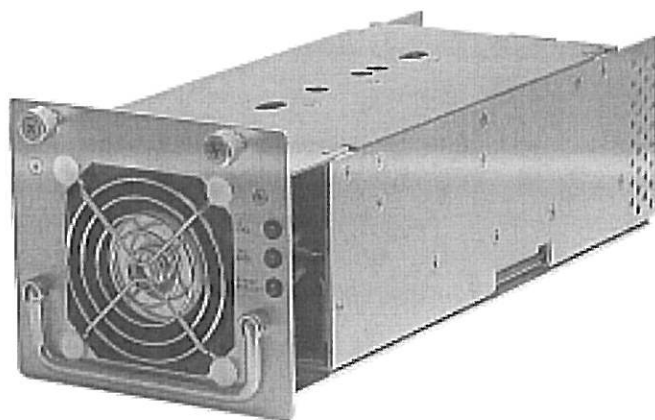

FEATURES

- 90-264 VAC INPUT RANGE
- ACTIVE POWER FACTOR CORRECTION
- 500 WATT CONTINUOUS OUTPUT POWER
- OUTPUTS INDIVIDUALLY PROTECTED AGAINST OVERLOADS; AUTOMATIC RECOVERY
- HOT-SWAP CAPABLE
- QUAD OUTPUT CONFIGURATION (5V, 3.3V, +12V, -12V)
- MEETS EMISSIONS SPECIFICATION FCC/EN55022 CLASS B
- SAFETY AGENCY APPROVED
- NO MINIMUM LOAD REQUIRED
- 83A COMBINED CURRENT FROM V1, V2

DESCRIPTION

The PCI500-4A is a modular, 500 watt, quad output power supply with active power factor correction. This hot-swap supply is designed specifically for redundant applications with active current sharing on the 5V and 3.3V outputs. The PCI500 incorporates a unique architecture that supports migration of 5V requirements to 3.3V by deriving both of these outputs from a common winding on the main transformer. The PCI500 is also ideal for networking equipment, communications and computer equipment where fault-tolerance is a necessity. A DC-input counterpart is available as the PCI500-4D for telecommunications environments. All outputs have remote sense and are individually protected against overloads and short circuits. With UL/cUL approval to UL1950, VDE approval to EN60950, CE Mark, and EMI compliance to FCC/CISPR22 Class B, the PCI500 provides a truly global power solution for your CompactPCI™ requirements.

AGENCY APPROVALS



Power Electronics Division, United States
3400 E Britannia Drive, Tucson, Arizona 85706
Phone: 800.547.2537
Fax: 520.770.9369

C&D Technologies, (NCL)
Tanners Drive Blakelands North
Milton Keynes MK14 5BU UK
Tel: +44 (0)1908 615232 Fax: +44 (0)1908 617545

Power Electronics Division, Europe
C&D Technologies (Power Electronics) Ltd.
132 Shannon Industrial Estate, Shannon, Co. Clare, Ireland
Tel: +353.61.474.133 Fax: +353.61.474.141

Any data, prices, descriptions or specifications presented herein are subject to revision by C&D Technologies, Inc. without notice. While such information is believed to be accurate as indicated herein, C&D Technologies, Inc. makes no warranty and hereby disclaims all warranties, express or implied, with regard to the accuracy or completeness of such information. Further, because the product(s) featured herein may be used under conditions beyond its control, C&D Technologies, Inc. hereby disclaims all warranties, either express or implied, concerning the fitness or suitability of such product(s) for any particular use or in any specific application or arising from any course of dealing or usage of trade. The user is solely responsible for determining the suitability of the product(s) featured herein for user's intended purpose and in user's specific application. C&D Technologies, Inc. does not warrant or recommend that any of its products be used in any life support or aviation or aerospace applications.

COMMON INPUT CHARACTERISTICS

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Input Voltage	V _{in}	47-63Hz	90		264	VAC
Inrush Current		120VAC input (cold start)			37	APK
		240VAC input (cold start)			75	APK
Input Surge		1 second duration			300	VAC
Power Factor*	PF	120 VAC input, 500W load		0.99		
*Harmonic Correction meets EN61000-3-2 (formerly IEC 555-2)						


ENVIRONMENTAL/SAFETY

The PCI500-4A is safety certified to UL/cUL 1950, EN60950/IEC 950. It is in agreement with the Global Emissions Compliance as specified by FCC Pt. 15 Class B.; CISPR 22/EN55022, Class B. It meets the Global Immunity Compliance as specified by EN 61000-4-2, -3, -4 and -5, Level 3. The Input Transient Protection is IEEE C62.41-1991, Class A2, IEEE 587B. The Power Module is CE marked in compliance with the low voltage directive.

SPECIFICATION CHART

Parameter	Min	Typ	Max	Units
Temperature				
Operation	0		+40	C°
Storage	-20		+70	C°
Altitude				
Operating			up to 10,000 feet	
Non-Operating			up to 40,000 feet	
Humidity			95% max. (non-condensing)	

MECHANICAL

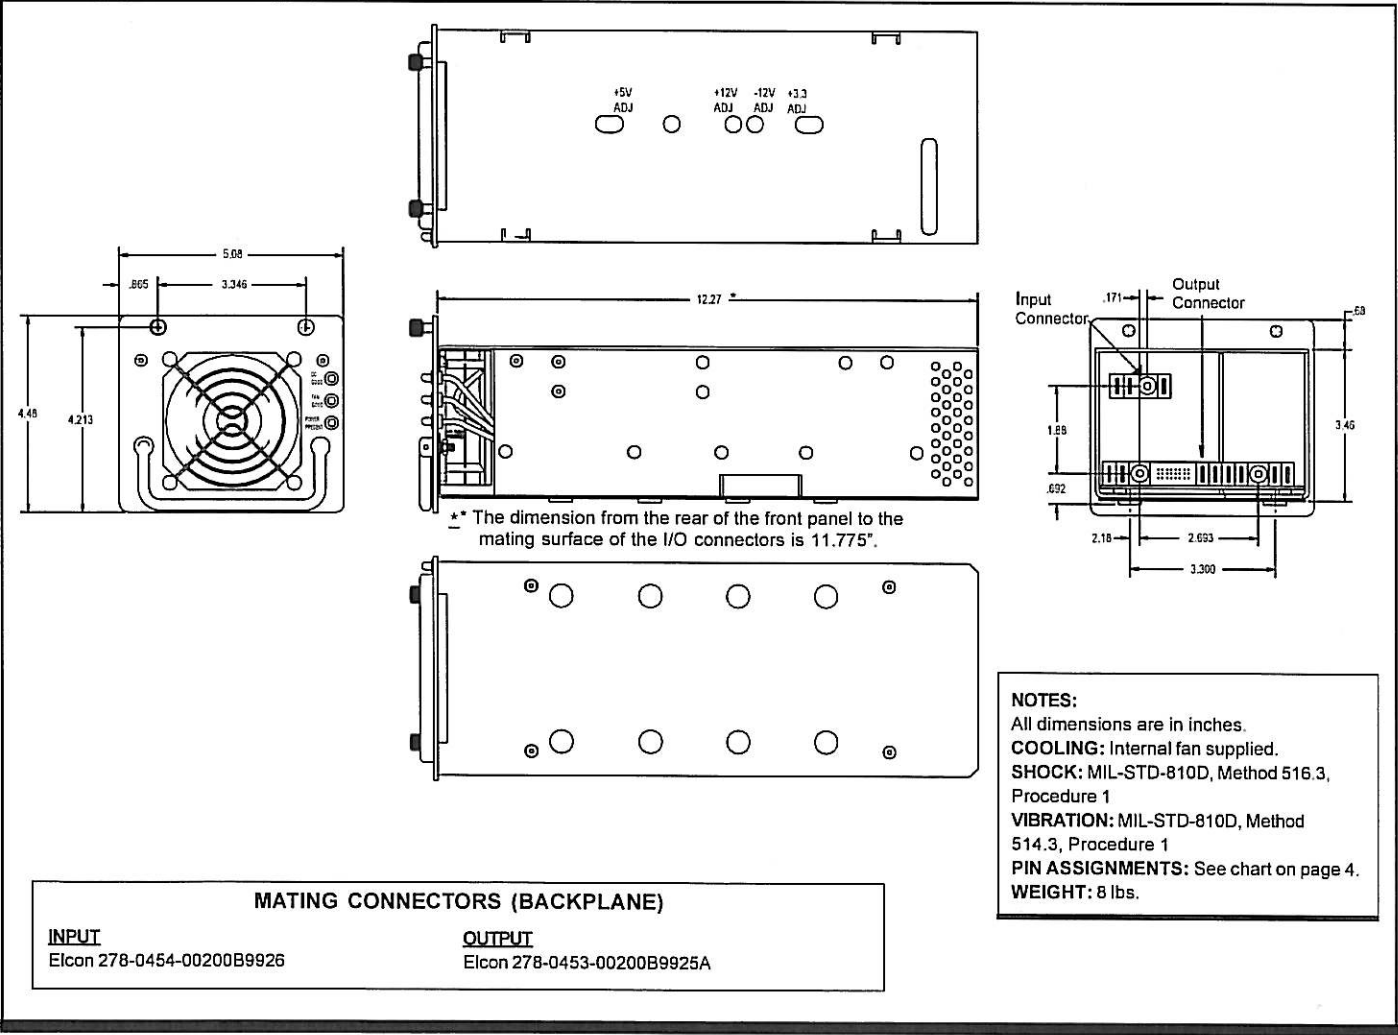

OUTPUT VOLTAGE/CURRENT

OUTPUT NUMBER	V _{OUT} RATED OUTPUT VOLTAGE	I _{OUT} RATED OUTPUT CURRENT	
		MIN	MAX
V1	+5.0V	0A	74A*
V2	+3.3V	0A	60A*
V3	+12.0V	0A	10A
V4	-12.0V	0A	2.5A

NOTES: Outputs 1 and 2 share common return. Outputs 3 and 4 have isolated Returns.

*Combined current output of 1 and 2 not to exceed 83A.

COMMON OUTPUT SPECIFICATIONS

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Voltage Adjustment		All outputs		±5		%
Temperature Coefficient	TC	0-40°C ambient after 30 minute warm-up			0.02	%/°C
PARD		20MHz bandwidth			1% P-P or 50mV _{P-P} whichever is greater	
Output Power		40°C max temp.			500	W

REGULATION (All Outputs)

PARAMETER	LIMIT
Line	± 0.2%
Load	±0.5%
Cross	±0.2%

COMMON OUTPUT CHARACTERISTICS

Transient Response

For a step load change of 25%, the peak output voltage excursion will not exceed 8% of nominal voltage, and will recover within 1% of nominal voltage in 400 microseconds.

Output Isolation

All outputs isolated from chassis.

Holdup Time

50 mSec minimum holdup at 250W load. Holdup time is approximately inversely proportional to the load.

Remote Sense

Remote Sense is on all outputs and is capable of compensating for 0.7V of line drop. Automatic local sensing is enabled on all outputs when remote sense leads are open. Remote sense leads are protected for open, reverse, and shorted conditions.

Hot Pluggable

Active Current Share circuitry on outputs V1 and V2, together with ORing diodes on all outputs and synchronous starting circuitry, allow for hot-swap in redundant applications.

Hot Swap Capability

Design Verification Testing (DVT) confirms that voltage excursions on the output buses resulting from insertion/extraction events do not exceed +/-5%. However, routing of power and signal lines in the mating backplane is critical to minimization of such excursions. In addition, performance can be critically affected by load characteristics including negative resistance, resistance, and reactive components. While the control loop responses have been designed for optimum hot-swap performance over a wide range of load characteristics, there may be instances where the voltage excursions exceed published specification. In such cases, the control loop responses can be modified to perform optimally.

CONTROL/ALARM SIGNALS

Remote Inhibit: Referenced to RTN (Logic), Pin 40 or 43. The power supply is off when the Remote Inhibit is less than 1V, typical.

Power Present LED:

A green LED will light when AC is applied and exceeds minimum operating limits.

DC Good Indicator:

A green LED will be illuminated when all outputs are between 90% and 110% (typical) of their nominal output voltage and extinguish when any voltage is out of this range.

Fan Fail:

TTL level signal goes low when fan fails. Referenced to RTN (Logic), Pin 40 or 43. A green LED gives a visual indication that the fan is operational.

DC OK:

An open collector output signal with an internal 2.2K Ω pull up resistor is connected to the +5V output. TTL signal will go high when all outputs are between 90% and 110% of their nominal output voltage.

Sync Start

A power supply generated signal used to simultaneously start supplies operated in parallel. These pins must be tied together at the backplane in parallel/redundant (N+0 or N+n) applications when N>1. In simple redundant (1+1) or non-parallel (1+0) applications, the pin can be ignored.

Current Share Bus

A power supply generated signal used to force current sharing between supplies operated in parallel (V1 and V2). These pins must be tied together at the backplane (5V CS to 5V

CONTROL/ALARM SIGNALS (cont'd)

CS and 3.3V CS to 3.3V CS).

Hot Swap Enable

This pin must be tied to the DC GND at the backplane for the power supply to operate. Since this pin is staged as the shortest in the connectors, it is a "last-make/first break" pin.

Power Supply Present

This pin presents a DC ground signal to the mating pin in the backplane. It is intended to be used by the system to detect if a power supply module is plugged into an available position.

OUTPUT PROTECTION

Over Current/Short Circuit Protection:

Outputs individually protected against overload and indefinite short circuit; automatic recovery after removal of fault.

Over Voltage Protection:

Output #1: 6.5V \pm 5V_{DC} typical

Output #2: 4.3V \pm 4V_{DC} typical

Over Voltage Protection will latch the power supply off until input power is cycled.

Power Limit:

Auto recovery; at 530W output power typical, the unit will cycle.

Reverse Voltage Protection:

All outputs protected up to rated current.

Over Temperature Protection:

Over Temperature shutdown with automatic recovery.

PINOUT ASSIGNMENTS

OUTPUT CONNECTOR WIRING	
PIN #	FUNCTION
45 to 54	+3.3V
55 to 64	+3.3V
85 to 94	+5V
95 to 104	+5V
65 to 74	GND (3.3V/5V)
75 to 84	GND (3.3V/5V)
1 to 10	+12V
11 to 20	GND (+12V)
24, 25, 28	-12V
21 to 23	GND (-12V)
29	+5V Sense
39	+3.3V Sense
41	+12V Sense
35	-12V Sense
34 (Short)	Hot Swap Enable
33	+5V Current Share
27	+3.3V Current Share
26	+5V Sense RTN
36	+3.3V Sense RTN
38	+12V Sense RTN
32	-12V Sense RTN
44	Fan Alarm
30	DC Good
42	Remote Inhibit
37	Power Supply Present (GND)
40	GND
43	GND
31	Sync Start
INPUT CONNECTOR WIRING	
PIN #	FUNCTION
1 to 10	AC Line
11 to 20	AC Neutral
21 to 30 (Long)	Chassis GND

CONNECTOR PINOUT DIAGRAM

