

DC-DC Converter DATA Sheet


MYSTM0051EEEEFA

1. Features

- Triple Output Voltage
- High efficiency , smll size and low profile.
- Surface Mount Type of Nom-insulated DC-DC Converter
- Fast Transient Response (Vout2 And Vout3)
- The short cicuit protection is built in.



2. Appearance, Dimensions

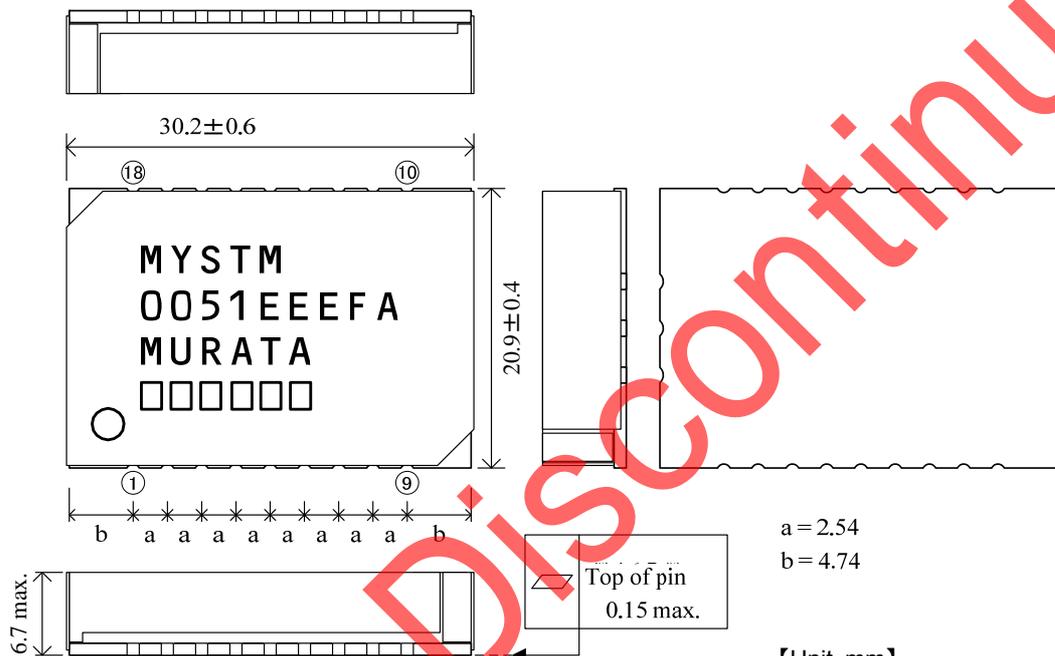

【Unit: mm】

Tolerance ±0.3mm
Toleranc is not accumulated.

Marking

(1)Manufacturer Parts Number	MYSTM0051EEEEFA
(2) Manufacturer ID	MURATA
(3) Lot No.	□□□□□□
(4)Pin No.1 Side Marking	○

⚠ Note:


1. This datasheet is downloaded from the website of Murata Manufacturing co., ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
2. This datasheet has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

2016.7.12

※ Pin Number, Function

Pin No.	Symbol	Function
1	Vin1	Ch1 Voltage Input Terminal
2,3	Vin23	Ch2,3 Voltage Input Terminal
4,5,6,7	GND	GND Terminal
8,9	Vout2	Ch2 Voltage Output Terminal
10,11	Vout3	Ch3 Voltage Output Terminal
12	N.C	No Connection
13,14,15,16	GND	GND Terminal
17,18	Vout1	Ch1 Voltage Output Terminal

3. Block Diagram

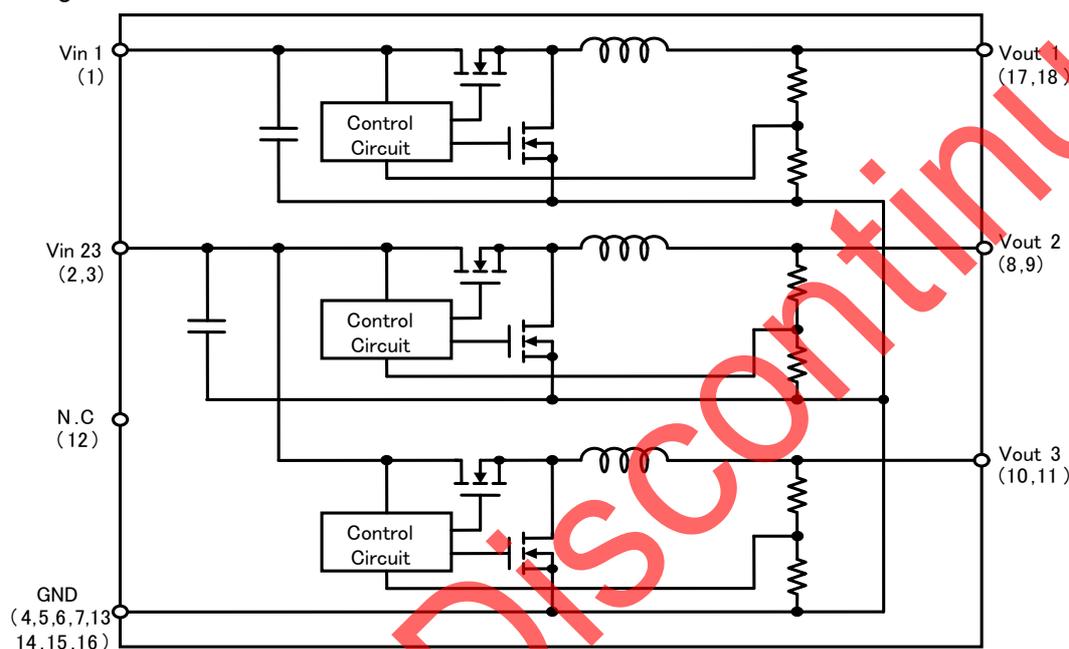

4. Environmental Conditions

- | | |
|----------------------------------|----------------------------|
| 4.1. Operating Temperature Range | -10°C ~ +70°C |
| 4.2. Storage Temperature Range | -20°C ~ +85°C |
| 4.3. Operating Humidity Range | 10% ~ 85% (No dew deposit) |
| 4.4. Storage Humidity Range | 5% ~ 90% (No dew deposit) |

5. Absolute Maximum Ratings

Item	Unit	Absolute Rating	Remarks
Maximum Input Voltage	V	16	

※No voltage, no matter how instantaneous, shall be applied beyond the absolute maximum voltage rating to this product.

If you apply any voltage over this limit the product characteristics will deteriorate or the product itself will be destroyed.

Even though it may continue operating for a while after the over-voltage event, its life will likely be shortened significantly. Reliability and life of the module may degrade similarly if the maximum operating voltage rating is continuously exceeded. This product is designed to operate within the maximum operating voltage rating specification.

⚠ Note:

- This datasheet is downloaded from the website of Murata Manufacturing co., ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
- This datasheet has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

6. Electrical Characteristics

6.1. Specific Characteristics (Ta=+25°C) Test circuit is mentioned in section 9.


Item	Symbol	Condition	Value			Unit
			Min.	Typ.	Max.	
Input Voltage	Vin	—	10.8	12.0	13.2	V
Output Voltage	Vout1	Vin=12.0V±10%	4.825	5.000	5.175	
	Vout2		3.184	3.300	3.416	
	Vout3		1.061	1.100	1.139	
Output Current	Iout1	Vin=12.0V±10%	0	—	1.5	A
	Iout2		0	—	1.5	
	Iout3		0	—	1.5	
Efficiency	Eff	Vin=12.0V Iout1=1.5A, Iout2=1.5A, Iout3=1.5A Vout1=5.0V, Vout2=3.3V, Vout3=1.1V	—	87	—	%
Output Ripple Voltage	Vrip1	Vin=12.0V Iout1=1.5A, Iout2=1.5A, Iout3=1.5A Vout1=5.0V, Vout2=3.3V, Vout3=1.1V BW=20MHz	—	30	—	mV(p-p)
	Vrip2		—	30	—	
	Vrip3		—	20	—	

※ Short Circuit Protection

If output is shorted to GND, DC-DC converter shall be operated in a hiccup mode.

After the short circuit event has cleared, the output is automatically brought back into regulation.

6.2. Output Current(Iout1,Iout2,Iout3) De-rating (Ta=-10~+70°C)

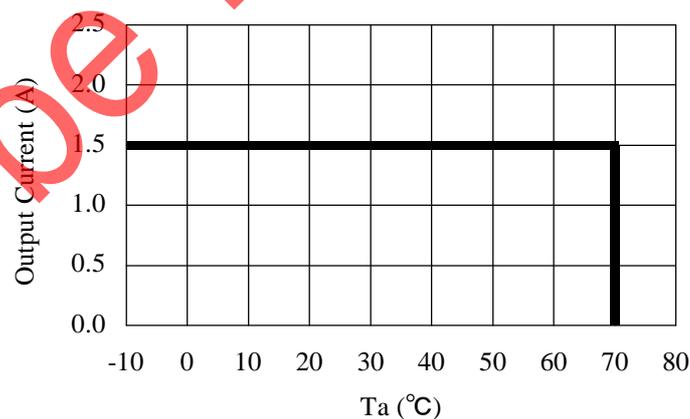


⚠ Note:

1. This datasheet is downloaded from the website of Murata Manufacturing co., ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
2. This datasheet has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.


2016.7.12

7. Operation information

7.1. Starting sequence

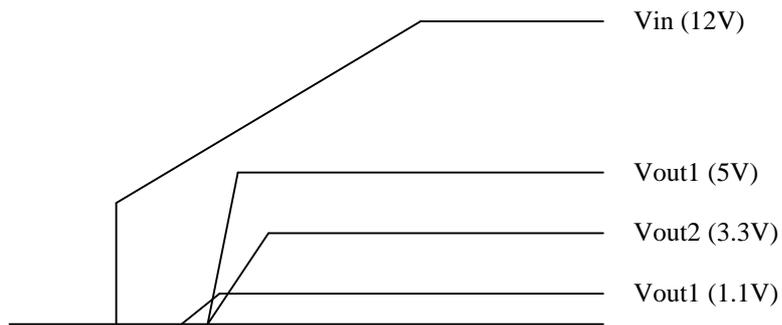

7.2. Stop sequence

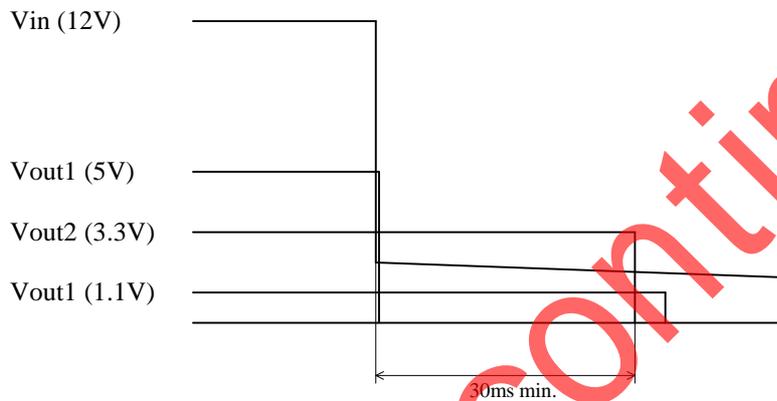

8. Reliability

8.1. Humidity Test

Subjected to a temperature $40^{\circ}\text{C}\pm 2^{\circ}\text{C}$ with 90~95% for 100 hours.
Return to room temperature (25°C) for 4 hours and measure. The initial values in item 6.1 should be met. (JIS-C-0022)

8.2. Thermal Cycle Test

Subjected to 5 cycle of the following.
Placed in room temperature (25°C) for 2 hours and are measured.
The initial values in item 6.1 should be met.

Step	Condition	Time
1	$-20^{\circ}\text{C}\pm 3^{\circ}\text{C}$	30 minutes
2	Room Temp.	10~15 minutes
3	$+85^{\circ}\text{C}\pm 2^{\circ}\text{C}$	30 minutes
4	Room Temp.	10~15 minutes


⚠ Note:

- This datasheet is downloaded from the website of Murata Manufacturing co., ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
- This datasheet has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

9. Test Circuit

In the following test circuit, the initial values in item 6.1 should be met.

9.1. General Measure Circuit

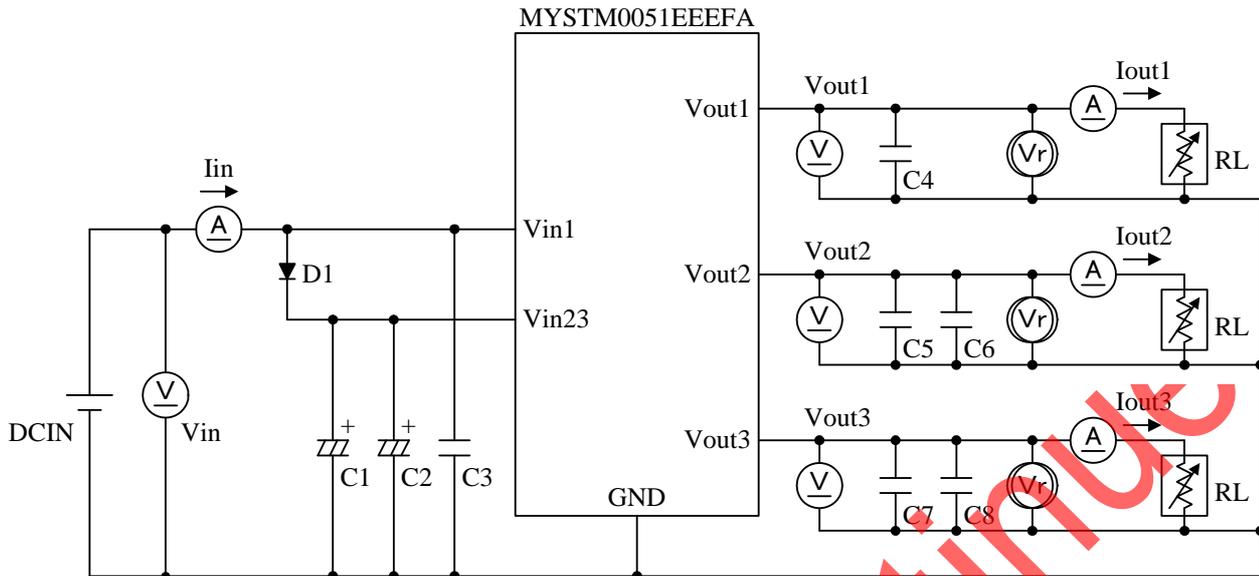

: Digital Multi meter HP34401A equivalent (Keysight Technologies)


: Ripple Voltmeter RM-101 equivalent (Keisokugiken)

: Electronic Load Device EUL-150αXL equivalent (Fujitsu Telecom Networks)

: DC Power Supply HP6653A equivalent (Keysight Technologies)

D1 : Schottky barrier diode
 C1,C2 : Low impedance electrolytic Capacitor 3300μF/16V
 C3 : Ceramic Capacitor 22μF/16V (GRM31CC81C226ME15L : Murata)
 C4~C8 : Ceramic Capacitor 0.1μF/16V 22μF / 6.3V (GRM21BC80J226ME51L : Murata)

9.2. Ripple Noise Test

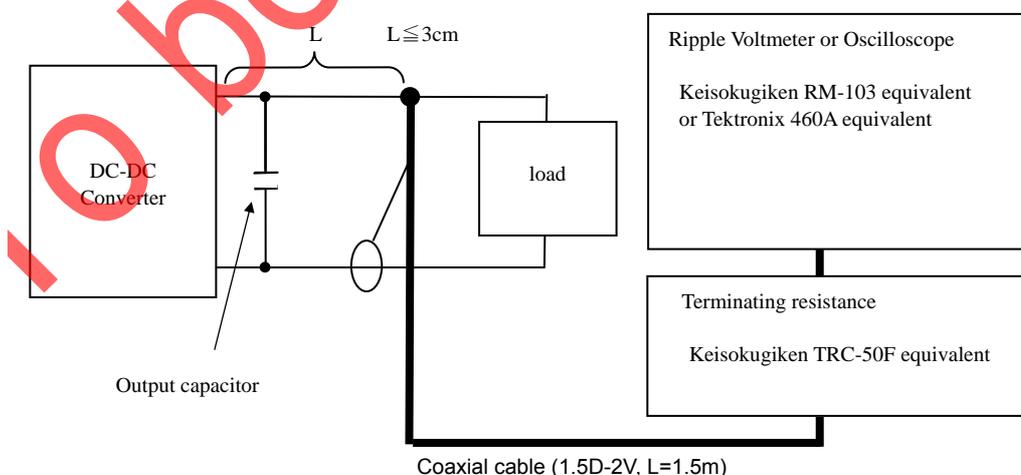

⚠ Note:

1. This datasheet is downloaded from the website of Murata Manufacturing co., ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
2. This datasheet has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

2016.7.12

10. Packaging Specification

10.1. Packing form

These are packed in a tray. (See Fig.1)

10.2. The number of products in pack specification form.

32pcs/tray

If the products have fraction, may not follow this specification.

10.3. Packaging form

These trays packed products are packaging in a corrugated box alternately.

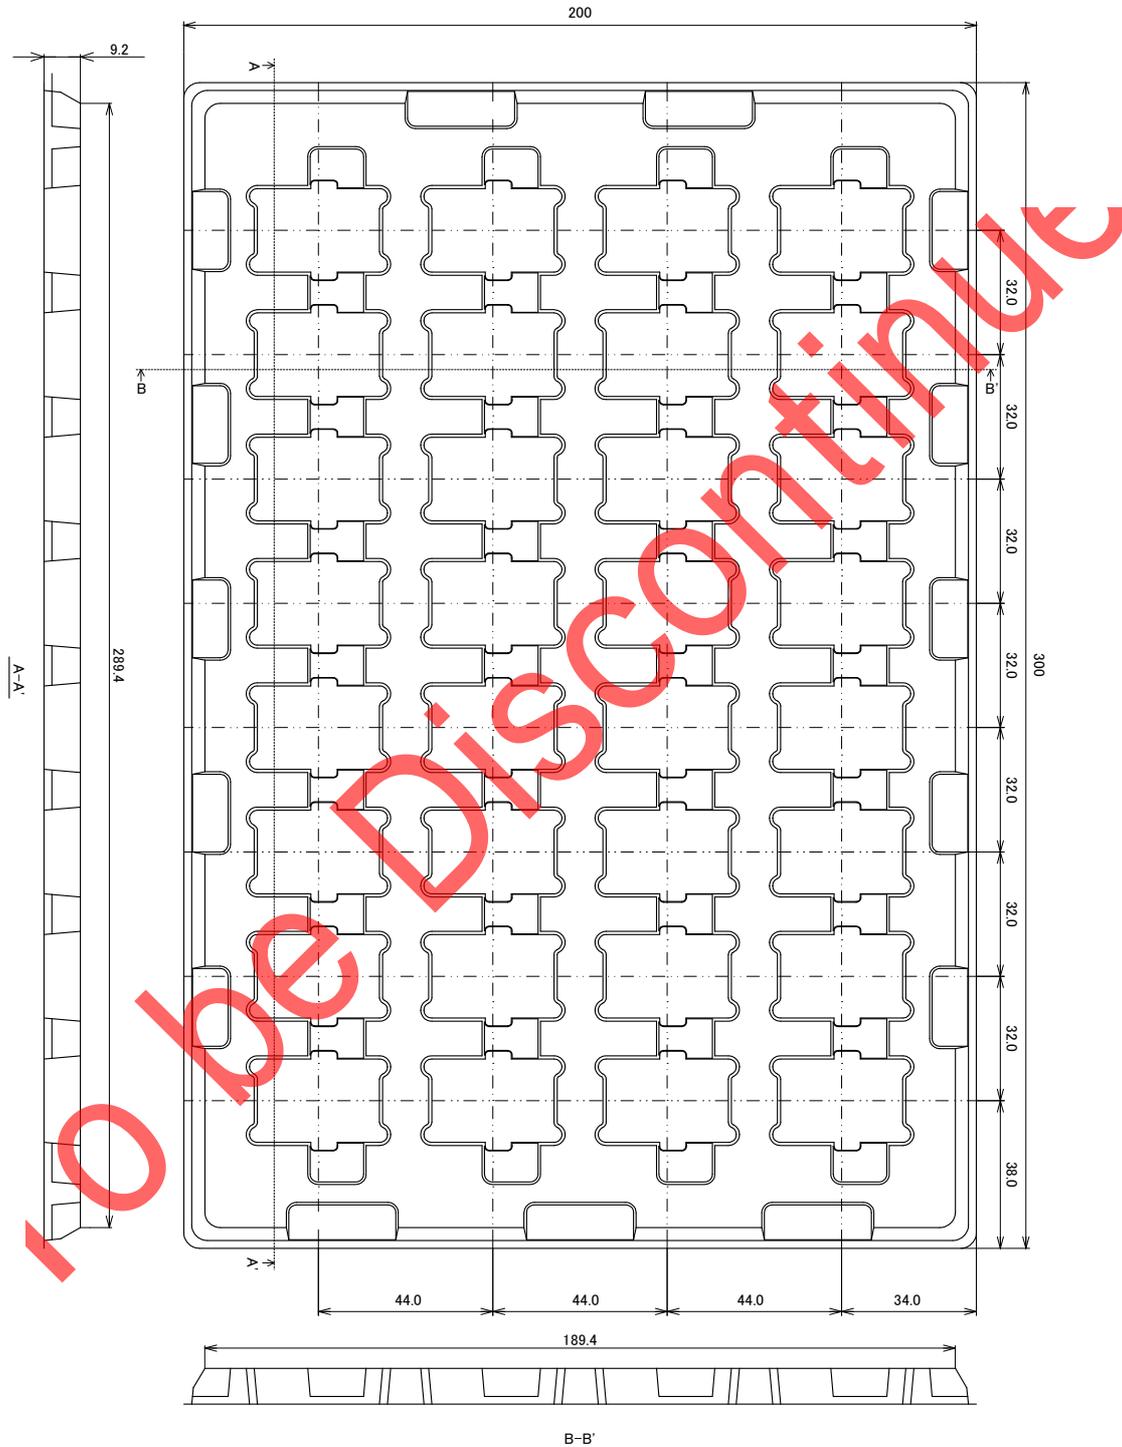


Fig.1


⚠ Note:

1. This datasheet is downloaded from the website of Murata Manufacturing co., ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
2. This datasheet has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

2016.7.12

11. Mounting Condition

11.1. Recommendable Solder Land Pattern

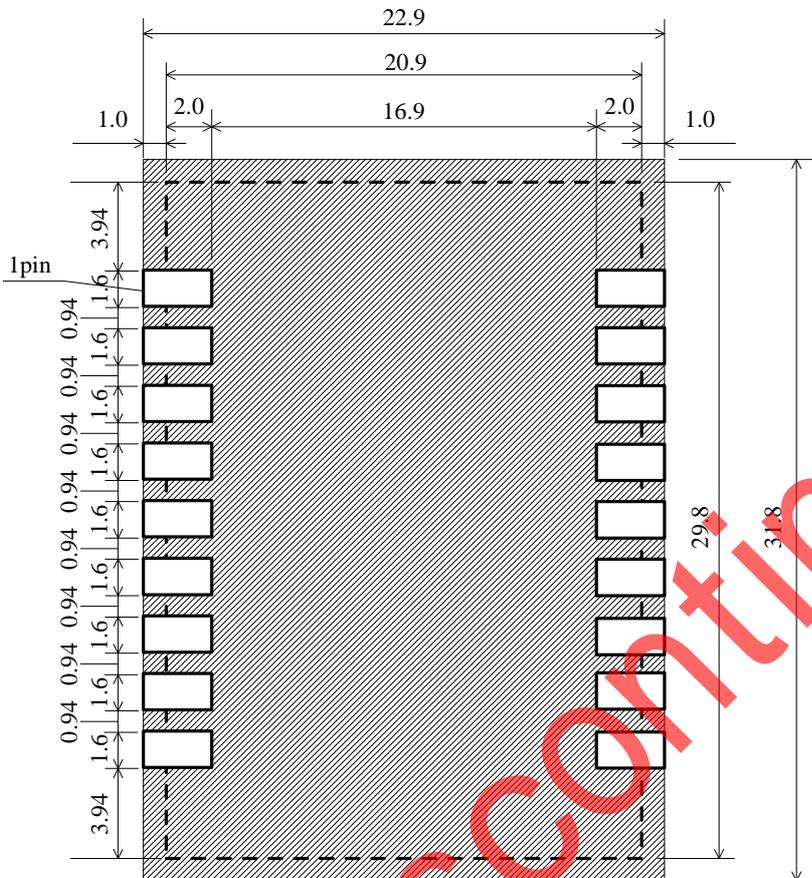

 Area prohibits wirings other than land.

There are wiring coppers or through-hole via at the bottom side of the DC-DC converter.

When you design your PCBs, please be careful not to short the circuit of the DC-DC converter or PCBs.


Note:

1. This datasheet is downloaded from the website of Murata Manufacturing co., ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
2. This datasheet has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

2016.7.12


11.2. Recommended Soldering Conditions

Method	: Infrared ray re-flow soldering
Profile details	
Soldering temperature	: Case surface temperature 260°C Max.
Soldering time (Over 250°C)	: 20 seconds Max. (Case surface temperature)
(Over 220°C)	: 30 ~ 75 seconds (Case surface temperature)
Preheating time	: 60 ~ 150 seconds (150 ~ 200 °C)
Heating rate	: 3°C/ sec. Max., 217~245°C
Times	: 1 time

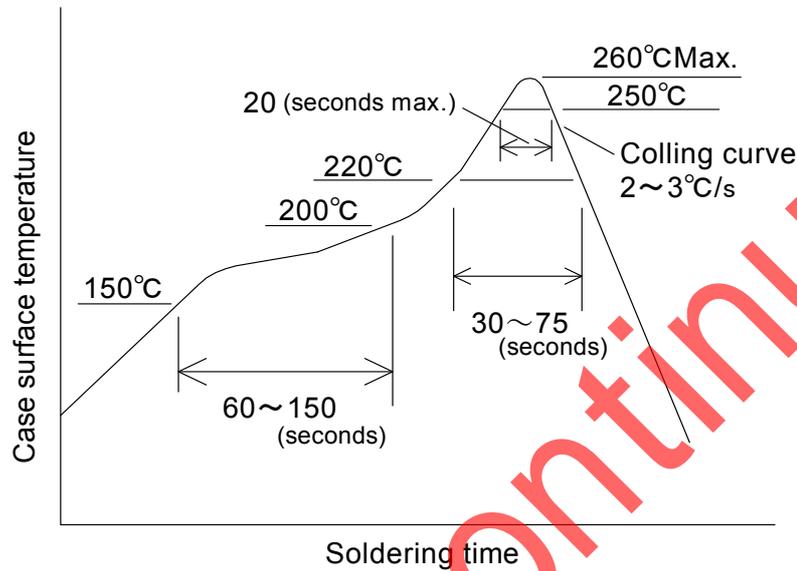

※Do not vibrate for the products on reflow.

Please need to take care temperature control because mounted parts may come off if the product are left under the high temperature.
Do not reflow DC-DC converter as follows, because DC-DC converter may fall down from a substrate during reflowing.

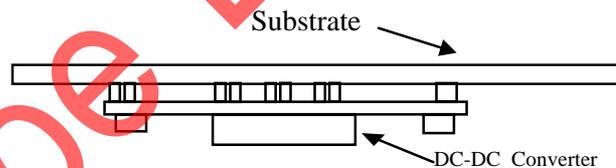

⚠ **Note:**

1. This datasheet is downloaded from the website of Murata Manufacturing co., ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
2. This datasheet has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

2016.7.12

12. Typical Characteristics Data

<Vin=10.8V~13.2V, Vout1=5.0V, Vout2=3.3V, Vout3=1.1V>

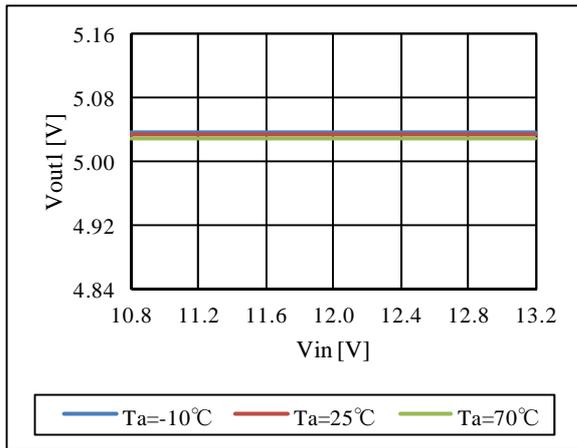


Fig.12-1a. Vin vs Vout1 (Iout1=0A)

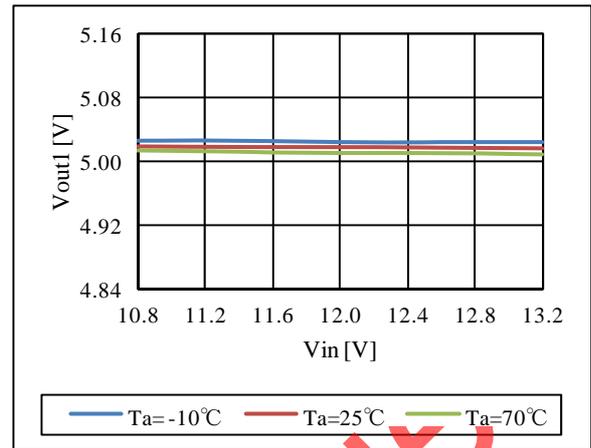


Fig.12-1b. Vin vs Vout1 (Iout1=1.5A)

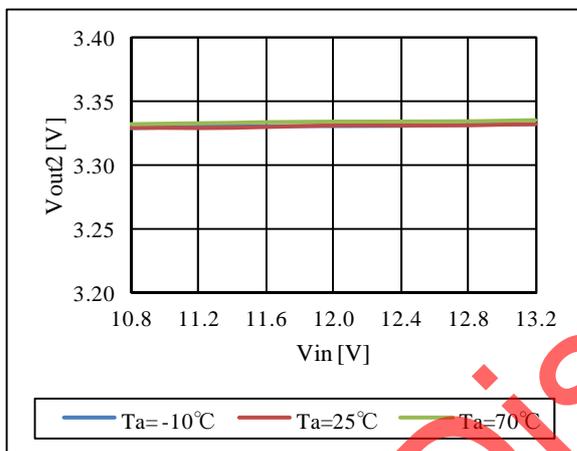


Fig.12-1c. Vin vs Vout2 (Iout2=0A)

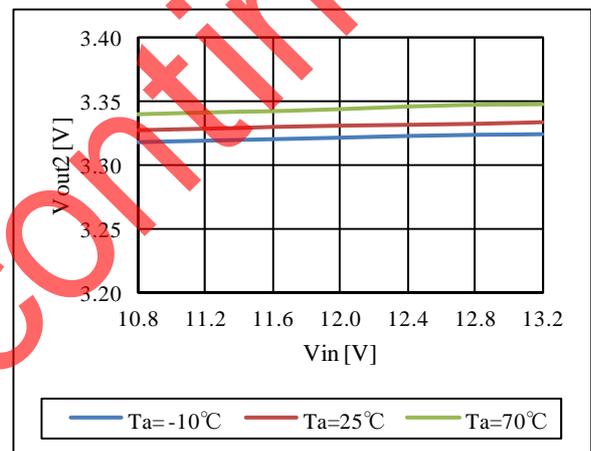


Fig.12-1d. Vin vs Vout2 (Iout2=1.5A)

⚠ Note:

1. This datasheet is downloaded from the website of Murata Manufacturing co., ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
2. This datasheet has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

2016.7.12

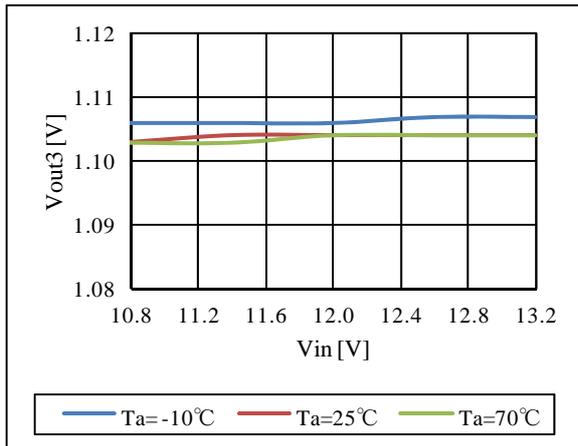


Fig.12-1e. Vin vs Vout3 (Iout3=0A)

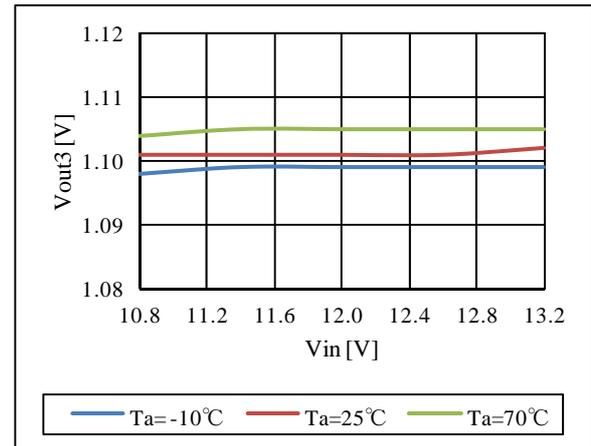


Fig.12-1f. Vin vs Vout3 (Iout3=1.5A)

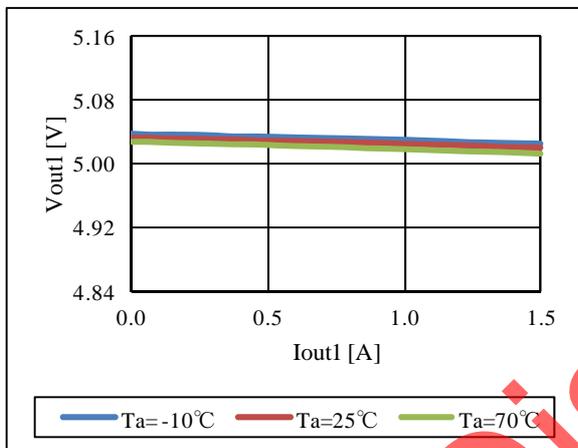


Fig.12-2a. Iout1 vs Vout1 (Vin=12V)

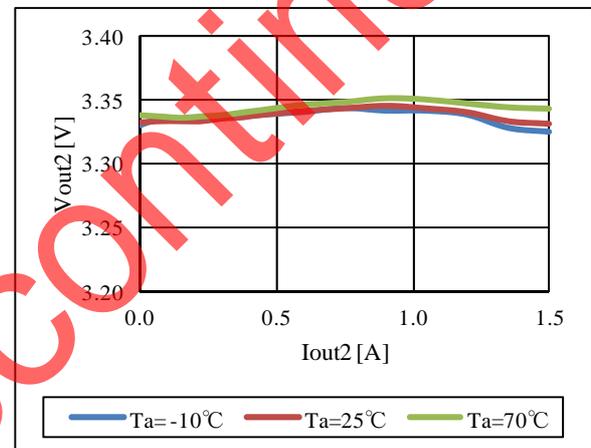


Fig.12-2b. Iout2 vs Vout2 (Vin=12V)

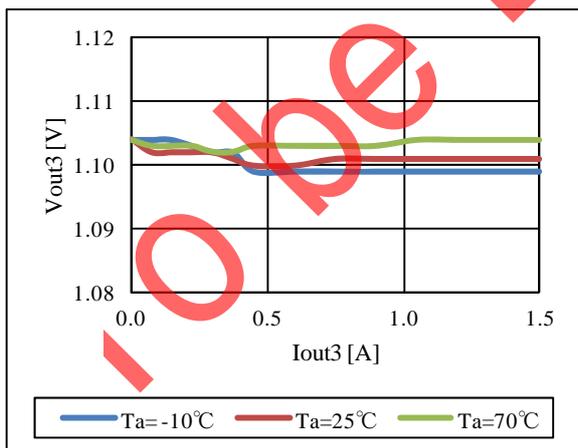


Fig.12-2c. Iout3 vs Vout3 (Vin=12V)

⚠ **Note:**

1. This datasheet is downloaded from the website of Murata Manufacturing co., ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
2. This datasheet has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

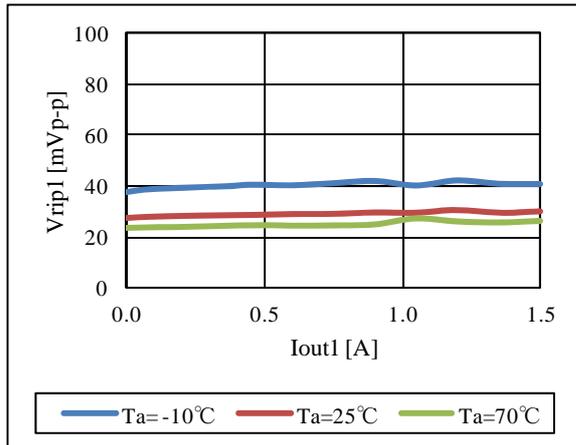


Fig.12-3a. Iout1 vs Vrip1 (Vin=12V)

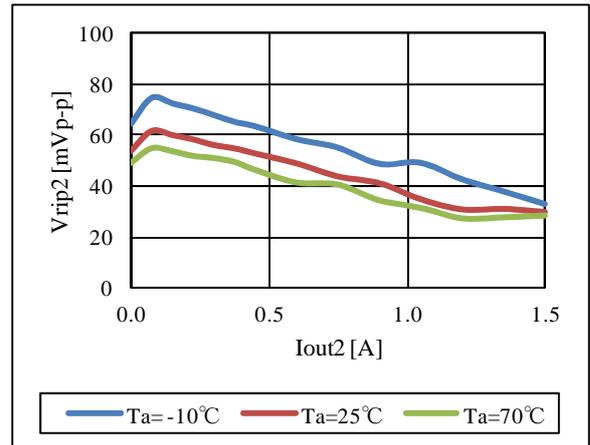


Fig.12-3b. Iout2 vs Vrip2 (Vin=12V)

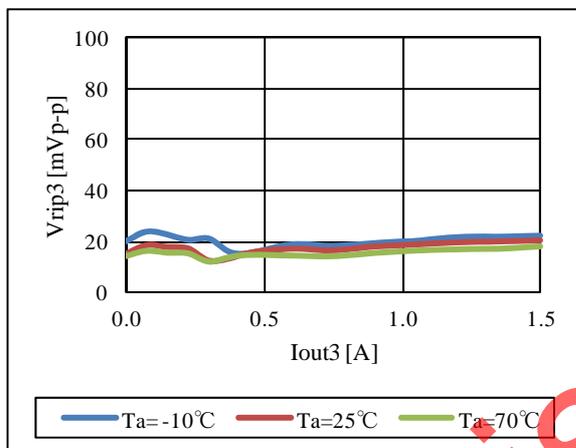


Fig.12-3c. Iout3 vs Vrip3 (Vin=12V)

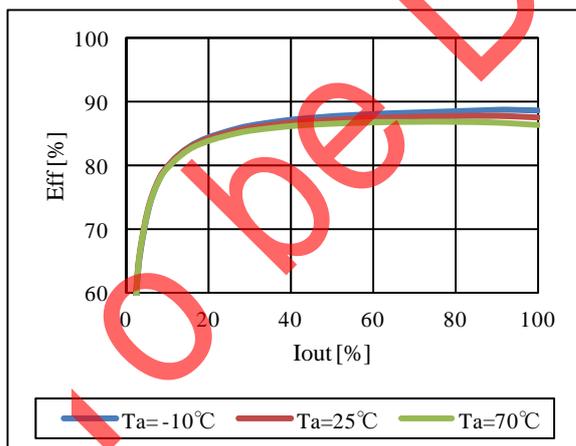


Fig.12-4a. Iout vs Eff (Vin=10.8V)

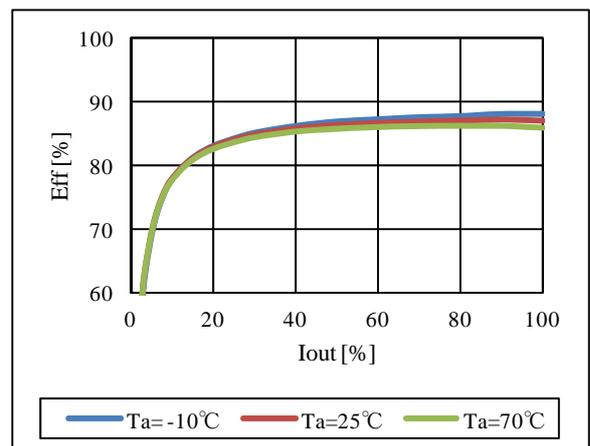


Fig.12-4b. Iout vs Eff (Vin=12V)

⚠ **Note:**

1. This datasheet is downloaded from the website of Murata Manufacturing co., ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
2. This datasheet has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

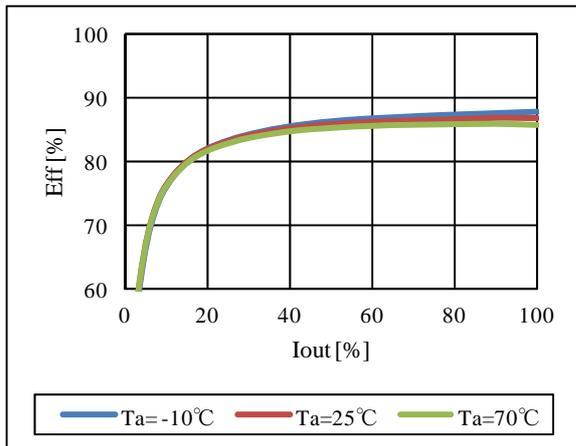
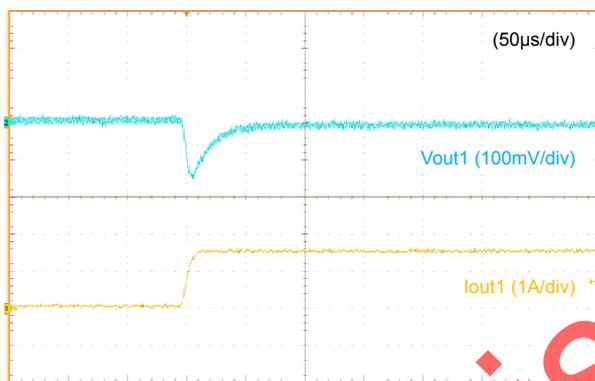
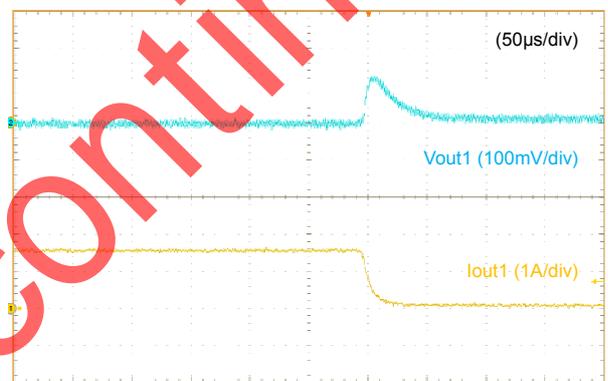
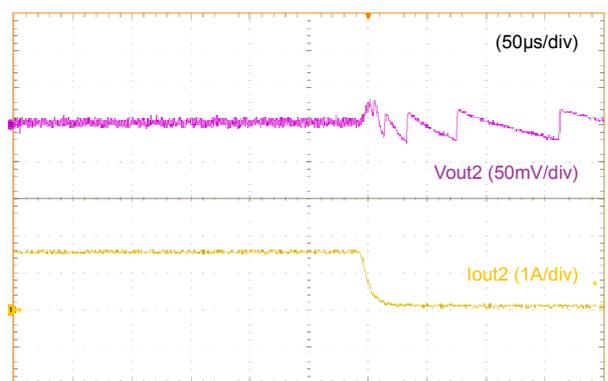


Fig.12-4c. Iout vs Eff (Vin=13.2V)

Fig.12-5a. Load Transient Response
(Iout1=0A→1.5A)Fig.12-5b. Load Transient Response
(Iout1=1.5A→0A)Fig.12-5c. Load Transient Response
(Iout2=0A→1.5A)Fig.12-5d. Load Transient Response
(Iout2=1.5A→0A)

⚠ **Note:**

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, its specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
2. This datasheet has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

2016.7.12

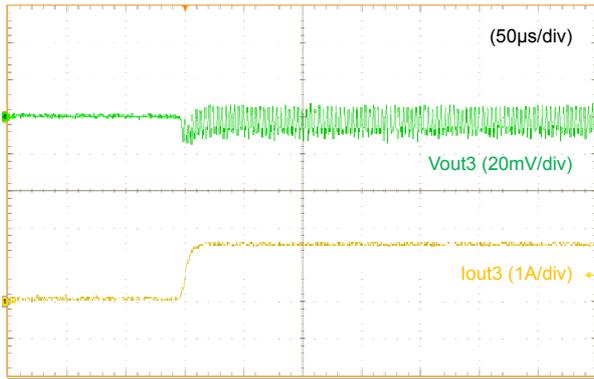


Fig.12-5e. Load Transient Response
(lout3=0A→1.5A)

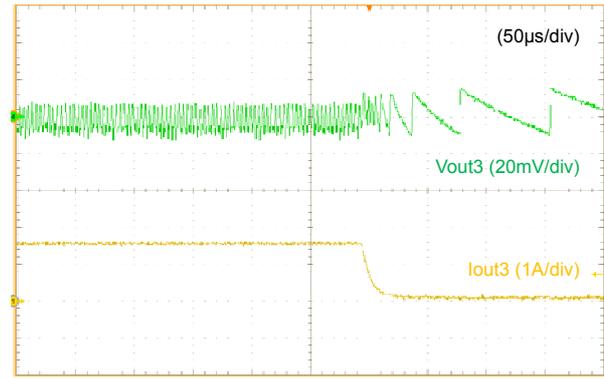


Fig.12-5f. Load Transient Response
(lout3=1.5A→0A)

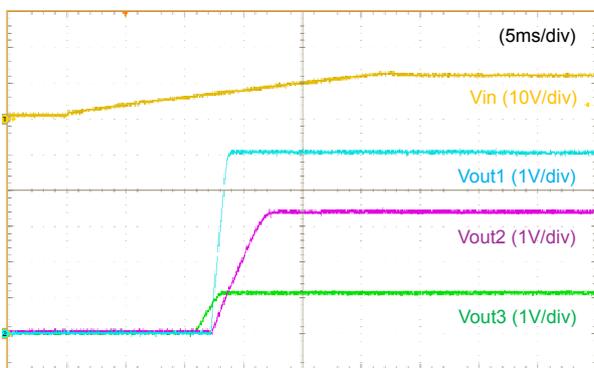


Fig.12-6a. Vin Start (Vin=12V, lout=1.5A)



Fig.12-6b. Vin Start (Vin=12V, lout=0A)



Fig.12-7a. Vin Stop (Vin=12V, lout=1.5A)

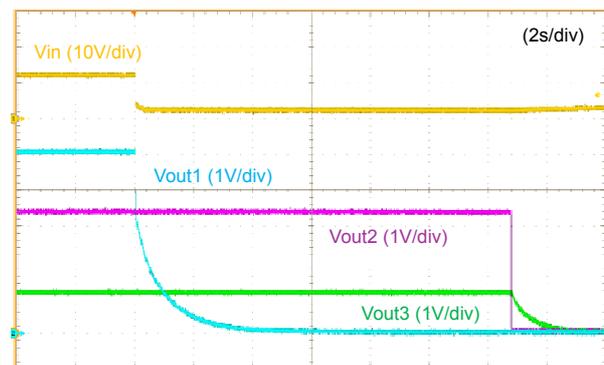


Fig.12-7b. Vin Stop (Vin=12V, lout=0A)


⚠ **Note:**

1. This datasheet is downloaded from the website of Murata Manufacturing co., ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
2. This datasheet has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

2016.7.12

13. Notice

- 13.1. Please do not use a connector or a socket for connection with your board of this product. Electrical performance may be deteriorated the influence of contact resistance. Please be sure to mount this product with solder.
- 13.2. Be sure to provide an appropriate fail-safe function on your product to prevent a second damage that may be caused by the abnormal function or the failure of our product.
- 13.3. Input / Output capacitor
When a inductance or a switch devise are connected to the input line, or when you use a power supply with output inductance as the input voltage source, the input voltage of the DC-DC converter will be fluctuated. By this input voltage fluctuation, the transient load response of the DC-DC converter may be deteriorated or abnormal oscillation may occur. So please confirm normal operation on each application. Please use external input capacitor in order to decrease inductance of input line.
- 13.4. Wiring of input / output capacitor
In the case of input / output capacitor connection, in order to reduce electrical noise, please design PCBs with consideration of the following item.
- ①. Please be sure to check normal operation on your system.
 - ②. Please use low impedance capacitors with good high frequency characteristic.
 - ③. Please shorten those leads of each capacitor as much as possible, and make sure the lead inductance low.
 - ④. Both input-side and output side, please make the wiring loop between plus and minus as small as possible. The influence of leakage inductance can be reduced.
 - ⑤. Please design the print pattern of the main circuit as wide and short as possible.

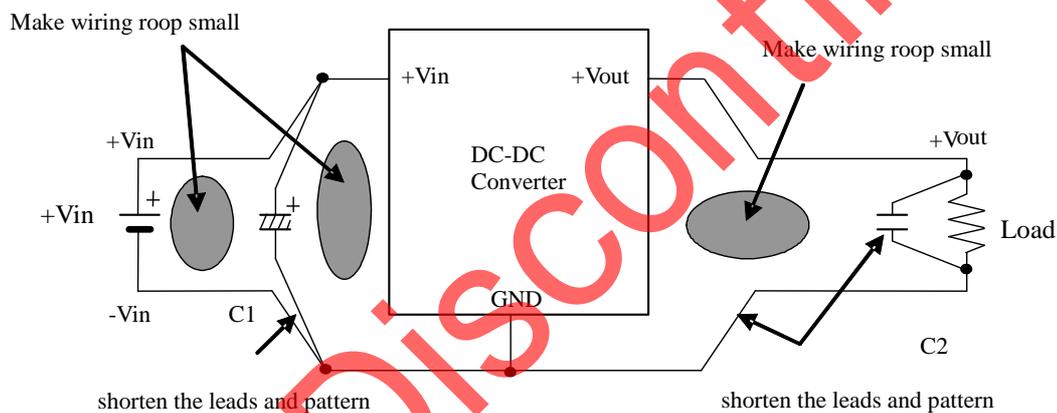


13.5. This product should not be operated in parallel or in series.

13.6. Inrush current protection is not a feature of this product.

Please be careful that surge voltage caused by wiring inductance etc. may make the product damage when input voltage is applied suddenly to the product.

13.7. Please connect the input terminal with proper polarity. If you connect wrong polarity, the DC-DC Converter may be broken. In the case of the DC-DC Converter is damaged, abnormal input current may flow in, and abnormal overheat of the DC-DC Converter, or some damage of your products may occur. Please use a diode and a fuse as following figure.

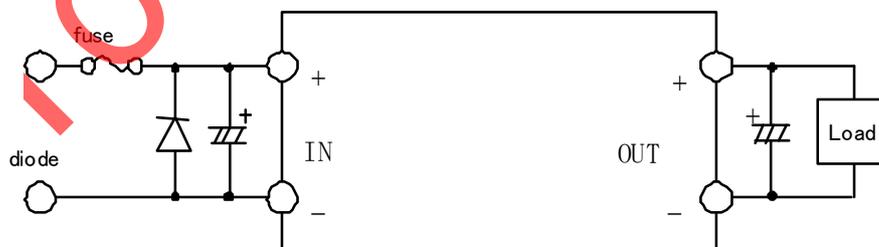

Rated Fuse Current : 5A

※Please select diode and fuse after confirming the operation.

⚠ **Note:**

1. This datasheet is downloaded from the website of Murata Manufacturing co., ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
2. This datasheet has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

2016.7.12

13.8. Cleaning

Please use no-cleaning type flux and do not wash this product.

13.9. Storage

13.9.1. Please store the products in room where the temperature/humidity is stable and direct sunlight cannot come in, and use the products within 6 months after delivery.

Please avoid damp and heat or such places where the temperature greatly changes, as water may condense on this product, and the quality of characteristics may be reduced, and/or be the solderability may be degraded.

If this product needs to be stored for a long time (more than 1 year), this product may be degraded in solderability and/or corroded. Please test the solderability of this product regularly. Baking before reflow process is unnecessary to store the products under 30°C,60%RH or less up to 6 months.

In case the storage condition is over above mentioned, if these are unpacked condition, please bake them at 125°C±5°C/24hour. If these are packed in a tape, please bake them before soldering at 60°C±5°C/168hour.

13.9.2. Please do not store this product in places such as :

A dusty place, a place exposed directly to sea breeze, or in an atmosphere containing corrosive gas (Cl₂,NH₃,SO₂,NOX and so on).

13.10. Operational Environment and Operational Conditions

13.10.1. Operational Environment

The products are not waterproof, chemical-proof or rust-proof.

In order to prevent leakage of electricity and abnormal temperature increase of the products, do not use the products under the following circumstances:

- (1) in an atmosphere containing corrosive gas (Cl₂, NH₃, SO₂, NOX and so on).
- (2) in a dusty place.
- (3) in a place exposed to direct sunlight.
- (4) in such a place where water splashes or in such a humid place where water condenses.
- (5) in a place exposed to sea breeze.
- (6) in any other places similar to the above (1)through (5).

13.10.2. Operational Conditions

Please use the products within specified values (power supply, temperature, input, output and load condition, and so on). Input voltage drop for line impedance, so please make sure that input voltage is included in specified values.

If you use the products over the specified values, it may break the products, reduce the quality, and even if the products can endure the condition for short time, it may cause degradation of the reliability.

Also please take care that the external voltage over output voltage of DC-DC Converter does not applies to output of this DC-DC Converter.

13.10.3. Note prior to use

If you apply high static electricity, over rated voltage or reverse voltage to the products, it may cause defects in the products or degrade the reliability.

Please avoid the following items:

- (1) over rating power supply, reverse power supply or not-enough connection of 0 V(DC) line.
- (2) electrostatic discharge by production line and/or operator.
- (3) electrified product by electrostatic induction.

Do not give an excessive mechanical shock.

If you drop the products on the floor, etc., it may occur a crack to the core of inductors and monolithic ceramic capacitors.

Do not give a strong shock such as a drop in handling.

13.11. Transportation

If you transport the products, please pack them so that the package will not be damaged by mechanical vibration or mechanical shock, and please educate and guide a carrier to prevent rough handling.

If you transport the products to overseas (in particular, by sea), it is expected that the transportation environment will be the worst, so please pack the products, in the package designed on the consideration of mechanical strength, vibration-resistant and humidity-resistant. The package of the products which Murata sells in Japan, may not resist over seas transport.

Please consult us if you are to use the Murata package of the products sold in Japan for transport to overseas.

⚠ Note:

1. This datasheet is downloaded from the website of Murata Manufacturing co., ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
2. This datasheet has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

**Note**

1. Murata recommends that customers ensure that the evaluation and testing of these devices are completed with this product actually assembled on their product.
2. Please contact our main sales office or nearby sales office before using our products for the applications listed below which require especially high reliability for the prevention of defects which might directly cause damage to the third party's life, body or property or this products for any other applications that described in the above.
 - ①Aircraft equipment
 - ②Aerospace equipment
 - ③Undersea equipment
 - ④Power plant control equipment
 - ⑤Medical equipment
 - ⑥Transportation equipment (vehicles, trains, ships, etc.)
 - ⑦Traffic signal equipment
 - ⑧Disaster prevention /crime prevention equipment
 - ⑨Data-processing equipment
 - ⑩Application of similar complexity and/or reliability requirements to the applications listed in the above.
3. If you have any concerned materials other than RoHS directive, please contact us.
4. About the written contents, since changing without a preliminary announcement for improvement and supply are sometimes stopped, please confirm in case of ordering.
If written contents are unknown, please ask to our main sales office or nearby sales office.

to be Discontinued

Note:

1. This datasheet is downloaded from the website of Murata Manufacturing co., ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
2. This datasheet has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

2016.7.12